



## Larson Systems Inc.

13847 Aberdeen Street NE  
Ham Lake, MN 55304-6789  
www.larsonsystems.com


Phone: 763-780-2131  
Fax: 763-780-2182  
Email: info@larsonsystems.com

# Packing Instructions for FLASH 11 & 24 Spring Testers

*(These instructions also apply to UT 11 & 24 Spring Testers)*

The best way to ship your tester is in the original reusable box and packing material that it came in. Use screws (not nails) to assemble the crate so that it can be reused. When packing the tester, please send all parts and accessories with the tester, including the power cord and any additional load cells. For best results, follow the steps below.

1. Leave the smallest capacity load cell installed and bring the platforms close together, but not touching. Turn off the tester using the shutdown command. Remove the power cord to include with the tester in the crate.
2. Turn the quick release knobs so they are not sticking out.

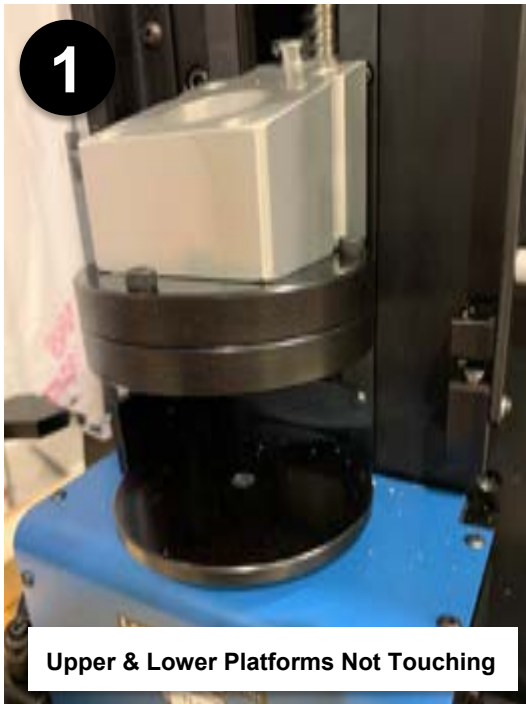


3. Remove the screws around the base of the crate and take the top of the crate off the base.
4. Lower the tester onto the carriage bolts in the bottom of the crate base (see photo on page 2).

**TIP:** Put wood blocks under the carriage bolts to keep them from dropping out of the base while you are loading the tester.



5. Add a rubber washer (to protect finish), metal washer, and a locking nut to the carriage bolts and tighten.

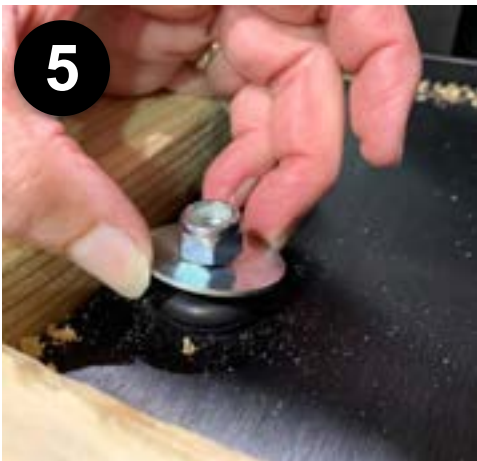

6. If you have additional load cells, screw a box inside the base of the crate and pack the load cells in the box. Use packing material to keep them immobile and tape the box closed.
7. Cover the tester with a plastic bag and tape or shrink wrap in place. This helps to keep it clean and keeps the shield from popping open during transit. Include some desiccant packets to absorb moisture during transit.



- Place the power cord and paperwork (quote, PO, or service note) with the tester in an envelope. Please include your preferred return freight shipper preference and account number (if applicable).



- Place the crate top over the crate base and secure the top to the base with wood screws.



- Ship the crate with your preferred freight carrier to:

**Larson Systems Inc.**

ATTN: Service

13847 Aberdeen Street NE

Ham Lake, MN 55304

**NOTE:**

All to and from shipping expenses are the customer's responsibility.